


# SATELLITE MULTISWITCHES

MODEL:MS1724C

DESCRIPTION:17×17×24 Cascadable Multiswitch

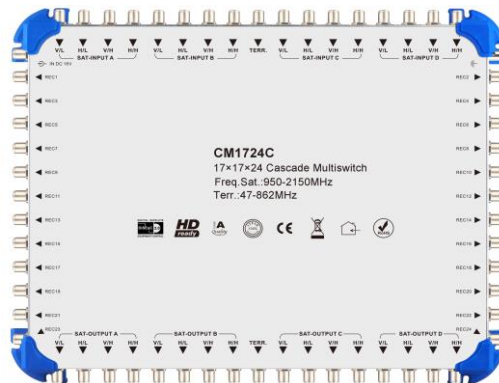

## Featrues:

- 16 satellite IF and 1 terrestrial TV inputs for 24 satellite receiver
- 16 satellite IF inputs selected by 13V、18V、22KHz and DisEqC 2.0 signal
- Low insertion loss, high isolation and return loss
- SAT-IF-PATHs to the subscribers are active and supplied by the receiver
- Sheet metal housing with plastic holder
- Design good for indoor usage

## Specifications

Item	Specifications	Typical	QC Limit	Remark
Frequency Range		Terr.:47~862MHz SAT:950~2150MHz		
Inputs		16 SAT+1 Terr.		F connectors
Outputs		24 Receiver		F connectors
Thru Loss	Terr.	4dB	5dB	
	SAT	4dB	5dB	
TAP Loss	Terr.	6dB	8dB	
	SAT	3dB	5dB	
Return Loss	Terr.	12dB	10dB	
	SAT	12dB	10dB	
Stop band attenuation	Terr.	28dB	25dB	
	SAT	28dB	25dB	
Isolation	H/V	30dB	25dB	
	REC-REC	30dB	25dB	
Power Supply		IN:90~264V OUT:18V 2500mA		
Dimensions (w,d,h)		362x280x42		mm